

D CLASS PREMIUM AMPLIFIER FPX 1.1000

DUAL OUTPUT – POWERFULL AND COMPACT

- High performance compact heat dissipation chassis.




- High power and current dynamic reserve.

- Audio Mos-Fets - Optimized efficiency.

KEY POINTS

- D Class Mono amplifier – High power and current dynamic reserve
- Stable under 1 Ohm
- Audio Mos-Fets - Optimized efficiency
- High performance compact heat dissipation chassis
- Included remote

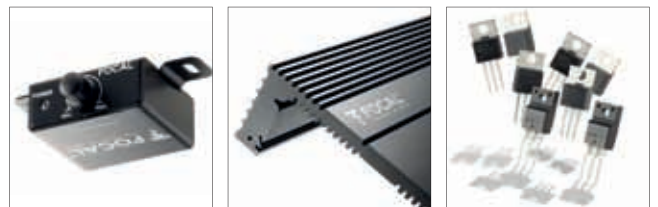

TECHNICAL SPECIFICATIONS



D Class Mono amplifier

CEA power (4 ohms): 1x420 Wrms

Maximum power (2 ohms): 1x700 Wrms

Maximum power (1 ohm): 1x1000 Wrms

Bandwidth: 15 Hz – 250 Hz

Total harmonic distortion: 0.08 %

SNR (1W/A): > 76 dBA

Low-pass filter: 50Hz-250Hz

Subsonic filter: 10Hz-50Hz

Progressive phase adjustment (0-180°)

Bass boost (0/12dB)

Protections: Short circuit / low impedance / reversal of polarity / DC / power drop / heat protection

Dimensions (LxHxW):

11^{11/16}x5^{13/64}x2^{33/32}" (297x132x53mm)

Weight: 5.62lbs (2.55kg)

 **Performance**
CREATE YOUR SOUND

 **FOCAL**[®]
THE SPIRIT OF SOUND

D CLASS PREMIUM AMPLIFIER FPX 4.800

MODE 4/3/2 CHANNELS - POWERFULL AND COMPACT

- High performance compact heat dissipation chassis.



- High power and current dynamic reserve.

- Audio Mos-Fets - Optimized efficiency.

KEY POINTS

- D class 4/3/2 Channel amplifier
- Stable under 2 Ohms
- Audio Mos-Fets - Optimized efficiency
- High performance compact heat dissipation chassis
- High power and current dynamic reserve



TECHNICAL SPECIFICATIONS



D Class amplifier - 4/3/2 channels

CEA power (4 ohms): 4x120 Wrms

Maximum power (2 ohms): 4x185Wrms

Maximum power (bridged 4 ohms):

2x370Wrms

Bandwidth: 10Hz - 20KHz

Total harmonic distortion: 0.01%

SNR (1W/A): >76dBA

Configurable filters High Pass / Low Pass :
50Hz-500Hz

Bass boost: (0/12dB)

Mirroring Mode: (4CH/2CH)

Full range function

Protections: Short circuit / low impedance / reversal of polarity / DC / power drop / heat protection

Dimensions (LxHxW):

92^{1/64}x51^{13/64}x2^{33/32}" (237x132x53mm)

Weight: 4.40lbs (2kg)

 **Performance**
CREATE YOUR SOUND

 **FOCAL**
THE SPIRIT OF SOUND

AB CLASS PREMIUM AMPLIFIER FPX 4.400 SQ

MODE 4/3/2 CHANNELS - DEDICATED TO SOUND QUALITY



• High performance compact heat dissipation chassis.

• High power and current dynamic reserve.

• Audiophile Sanken® Transistors.

KEY POINTS

- AB Class 4/3/2 Channel amplifier - Dedicated to sound quality
- Stable under 2 Ohms
- Audiophile Sanken® Transistors
- High performance compact heat dissipation chassis
- High power and current dynamic reserve



TECHNICAL SPECIFICATIONS



AB Class amplifier - 4/3/2 channels

CEA power (4 ohms): 4x70 Wrms

Maximum power (2 ohms): 4x100Wrms

Maximum power (bridged 4 ohms): 2x200Wrms

Bandwidth: 10Hz – 22KHz

Total harmonic distortion: 0.04%

SNR (1W/A) : >77dBA

Configurable filters High Pass / Low Pass :
40Hz-5000Hz

Mirroring Mode: (4CH/2CH)

Full range function

Protections: Short circuit / low impedance / reversal of polarity / DC / power drop / heat protection

Dimensions (LxHxW):

12^{23/64}x6^{57/64}x2^{1/4}" [314x175x57mm]

Weight: 8.16lbs (3.7kg)

 **Performance**
CREATE YOUR SOUND

 **FOCAL**
THE SPIRIT OF SOUND

D CLASS PREMIUM AMPLIFIER FPX 2.750

STEREO - POWERFULL AND COMPACT

- High performance compact heat dissipation chassis.




- High power and current dynamic reserve.

- Audio Mos-Fets - Optimized efficiency.

KEY POINTS

- D Class – Stereo – Powerfull and Compact
- Stable under 2 Ohms
- Audio Mos-Fets - Optimized efficiency
- High performance compact heat dissipation chassis
- High power and current dynamic reserve
- Included remote

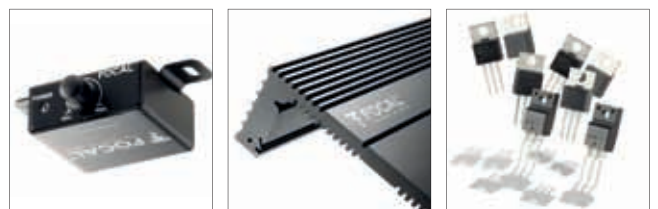

TECHNICAL SPECIFICATIONS



D Class amplifier - Stereo / Mono

CEA power (4 ohms): 2x220 Wrms

Maximum power (2 ohms): 2x385 Wrms

Maximum power (bridged 4 ohms):

1x770 Wrms

Bandwidth: 20Hz – 20KHz

Total harmonic distortion: 0.01%

SNR (1W/A): >76dBA

Configurable filters High Pass / Low Pass:

50Hz-500Hz

Subsonic filter: 20Hz-50Hz

Bass boost: (0/12dB)

Full range function

Protections: Short circuit / low impedance / reversal of polarity / DC / power drop / heat protection

Dimensions (LxHxW):

9x5^{13/64}x2^{3/32}" (237x132x53mm)

Weight: 4.40lbs (2kg)

 **Performance**
CREATE YOUR SOUND

 **FOCAL**[®]
THE SPIRIT OF SOUND