




Integration **F-ICU100**

UNIVERSAL ICU100

Product Data Sheet

2-way coaxial kit

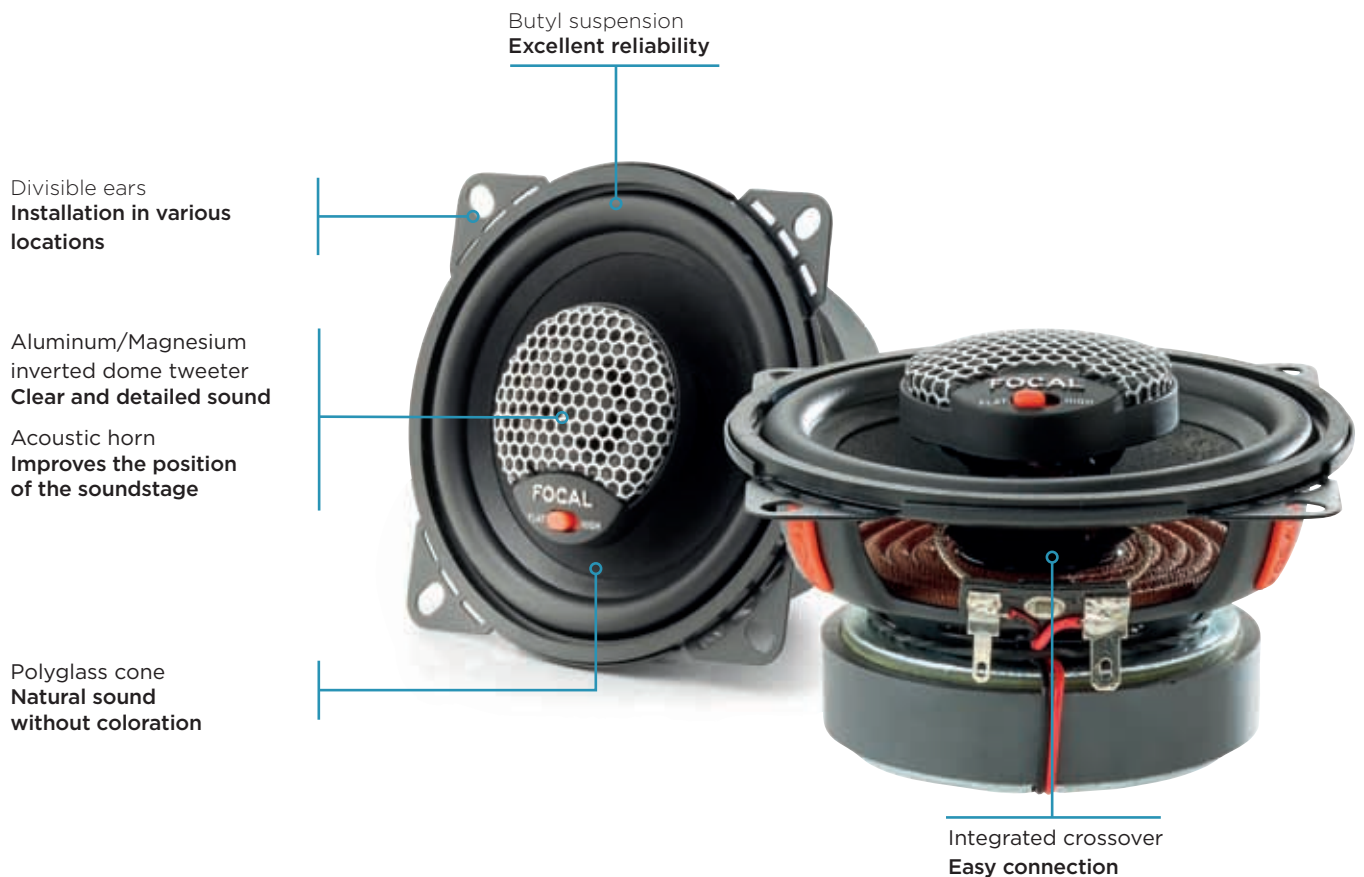

ADVANTAGES

- High sensitivity
- Shallow mounting depth (1⁵⁹/₆₄" - 49mm)
- Great improvement from original car speakers
- Dynamics and neutrality



Acoustic horn



Level adjustment

TECHNICAL CHARACTERISTICS

Woofer: 4" (100mm)
Voice coil diameter: 1" (25mm)
Max. power: 80W
Nom. power: 40W RMS

Sensitivity (2.83V/1m): 90.3dB
Frequency response: 100Hz-21kHz
Al/Mg inverted dome tweeter
Accessories: delivered without grilles


Integrated crossover: 6dB/oct



UNIVERSAL ICU130

Product Data Sheet

2-way coaxial kit

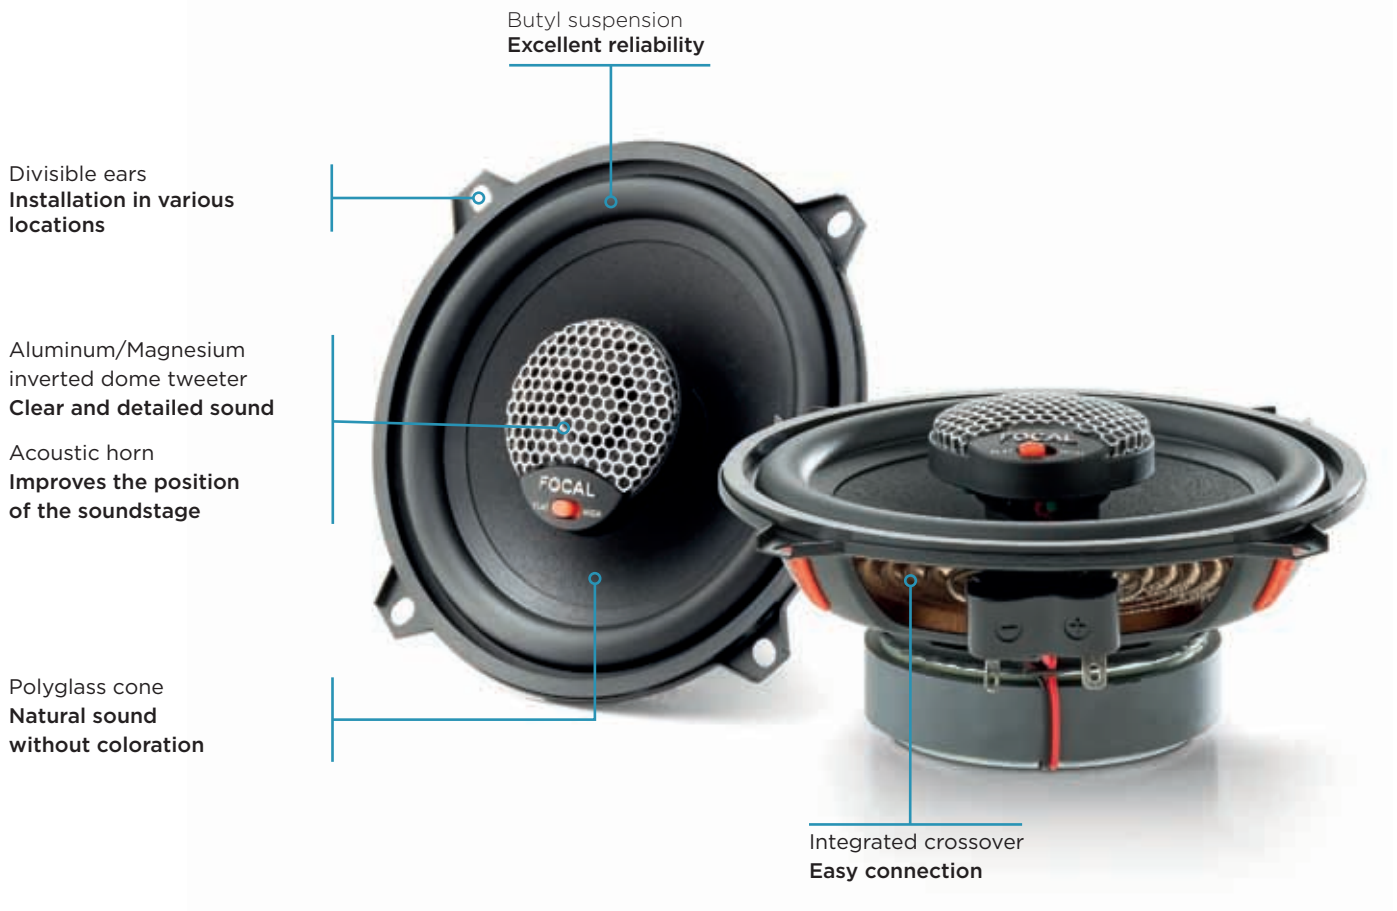

ADVANTAGES

- High sensitivity
- Shallow mounting depth (1⁵⁹/₆₄" - 48.9mm)
- Great improvement from original car speakers
- Dynamics and neutrality



Acoustic horn



Level adjustment

TECHNICAL CHARACTERISTICS

Woofer: 5¹/₈" (130mm)
Voice coil diameter: 1" (25mm)
Max. power: 120W
Nom. power: 60W RMS

Sensitivity (2.83V/1m): 91.8dB
Frequency response: 90Hz-21kHz
Al/Mg inverted dome tweeter
Accessories: delivered without grilles


Integrated cross



UNIVERSAL ICU165

Product Data Sheet

2-way coaxial kit

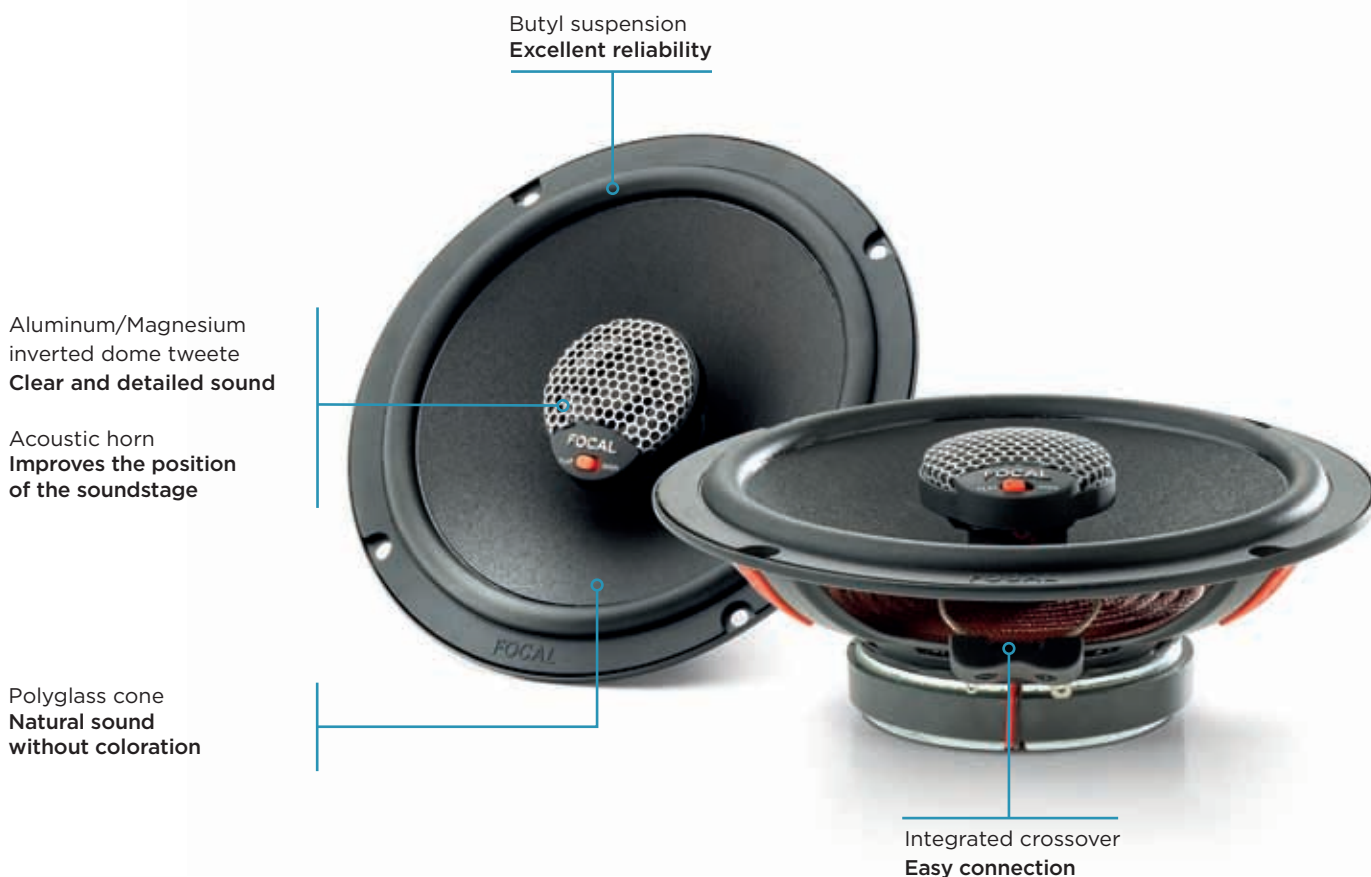

ADVANTAGES

- High sensitivity
- Shallow mounting depth (1²⁹/₃₂" - 48.4 mm)
- Great improvement from original car speakers
- Dynamics and neutrality



Acoustic horn



Level adjustment

TECHNICAL CHARACTERISTICS

Woofer: 6¹/₂" (165mm)
Voice coil diameter: 1" (25mm)
Max. power: 140W
Nom. power: 70W RMS

Sensitivity (2.83V/1m): 93dB
Frequency response: 60Hz-21kHz
Al/Mg inverted dome tweeter
Accessories: delivered without grilles

Integrated crossover: 6dB/oct




Integration **F-ICU570**

UNIVERSAL ICU570

Product Data Sheet

2-way coaxial kit

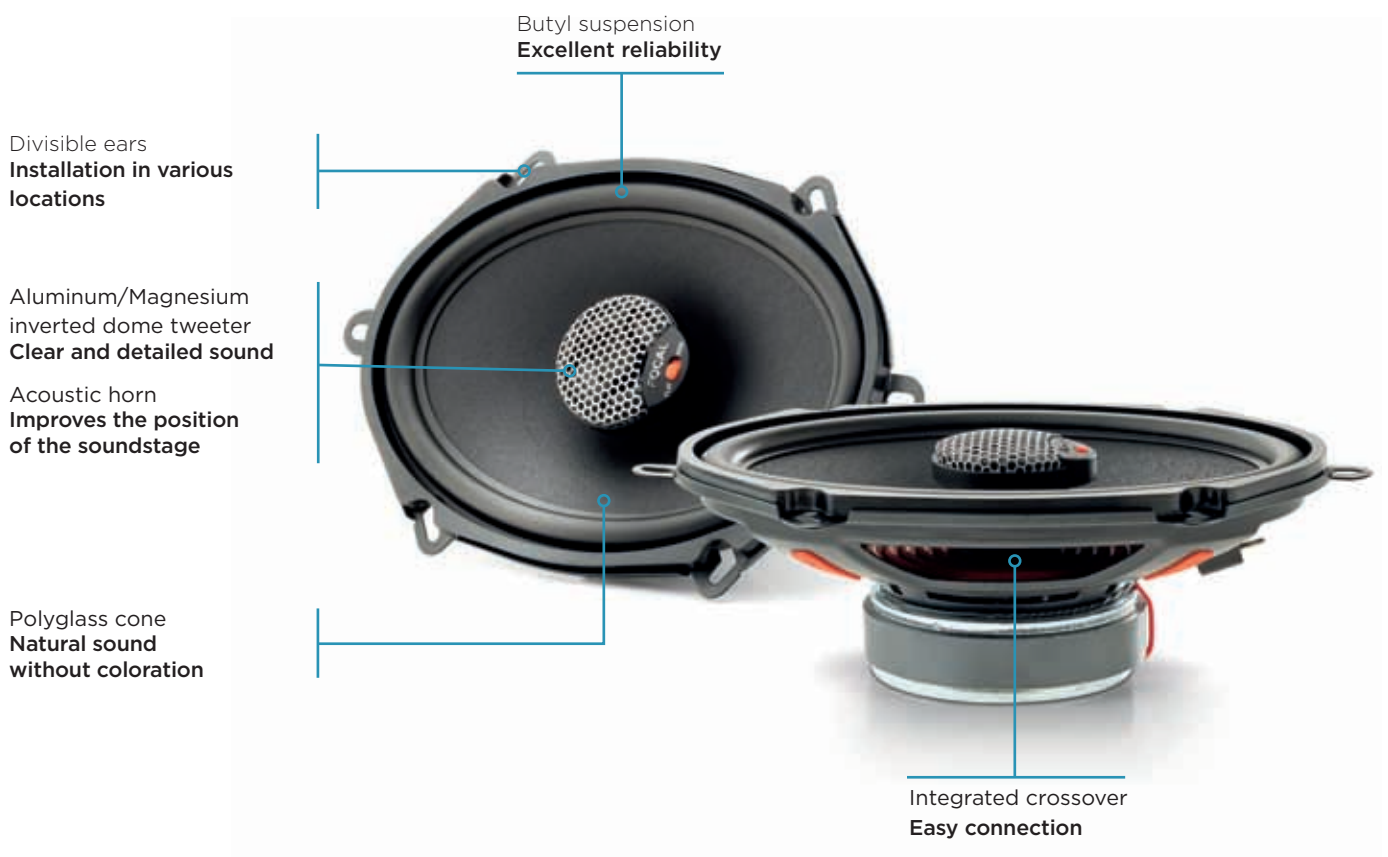

ADVANTAGES

- High sensitivity
- Shallow mounting depth (2²¹/₆₄" - 59.3mm)
- Great improvement from original car speakers
- Dynamics and neutrality



Acoustic horn



Level adjustment

TECHNICAL CHARACTERISTICS

Woofer: 5"x7" (130x180mm)
Voice coil diameter: 1" (25mm)
Max. power: 140W
Nom. power: 70W RMS

Sensitivity (2.83V/1m): 94dB
Frequency response: 60Hz-21kHz
Al/Mg inverted dome tweeter
Accessories: delivered without grilles

Integrated crossover: 6dB/oct




Instant gratification

Integration **F-ICU690**

UNIVERSAL ICU690

Product Data Sheet

2-way coaxial kit

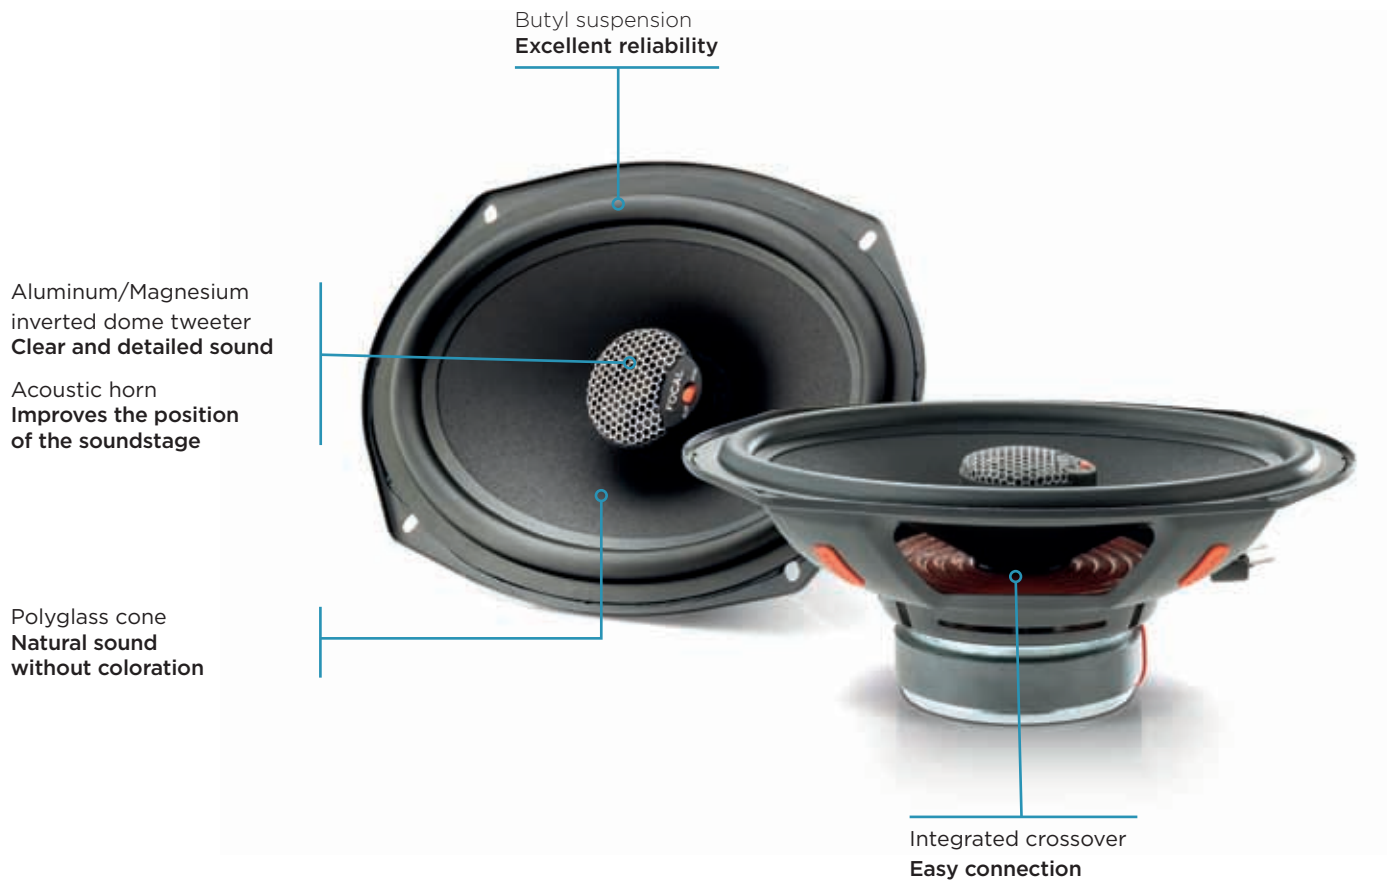

ADVANTAGES

- High sensitivity
- Shallow mounting depth (3⁹/₃₂" - 83.5mm)
- Great improvement from original car speakers
- Dynamics and neutrality



Acoustic horn



Level adjustment

TECHNICAL CHARACTERISTICS

Woofers: 6"x9" (164x235mm)
Voice coil diameter: 1" (25mm)
Max. power: 160W
Nom. power: 80W RMS

Sensitivity (2.83V/1m): 93.6dB
Frequency response: 55Hz-21kHz
Al/Mg inverted dome tweeter
Accessories: delivered with grilles

Integrated crossover: 6dB/oct